


型号(Type) : KAN AA50 (1400) mAh

单体电池规格 Specifications of single cell

|                                              |                   |                                      |
|----------------------------------------------|-------------------|--------------------------------------|
| 标称电压<br>Nominal voltage                      |                   | 1.2V                                 |
| 容量<br>Capacity                               | 0.2C 放电 Discharge |                                      |
|                                              | 最小 Minimum        | 280min                               |
|                                              | 典型 Typical        | 300min                               |
| 尺寸<br>Dimensions                             | mm                |                                      |
|                                              | 直径 Diameter       | 14.5 <sup>+0.5</sup> <sub>-0.5</sub> |
|                                              | 高 Height          | 50.5 <sup>+1.0</sup> <sub>-1.0</sub> |
| 大约重量<br>Weight(Approximately)                |                   | 克 gram<br>27.8g                      |
| 内阻<br>Internal Resistance<br>At 1500 Hz, 25℃ |                   | 15mΩ(Max)<br>(充电后 After Charge)      |
| 充电 Charge                                    | 标准 Standard       | 140mA(0.1C)×16hrs                    |
|                                              | 常规 Conventional   | 280mA(0.2C)×6.5hrs                   |
|                                              | 快速 Rapid          | 700mA(0.5C)<br>~1400mA(1C)           |
|                                              | 湿度 Humidity       | 80℃ (Max)                            |
| 环境温度<br>Ambient temperature                  | 充电 Charge         | 标准 standard<br>0℃ to 45℃             |
|                                              |                   | 常规 Conventional<br>0℃ to 40℃         |
|                                              |                   | 快速 Rapid                             |
|                                              | 放电 Discharge      | -20℃ to 60℃                          |
|                                              | 贮藏 Storage        | -20℃ to 40℃                          |

单体电池尺寸包括 PVC (Dimensions with tube)

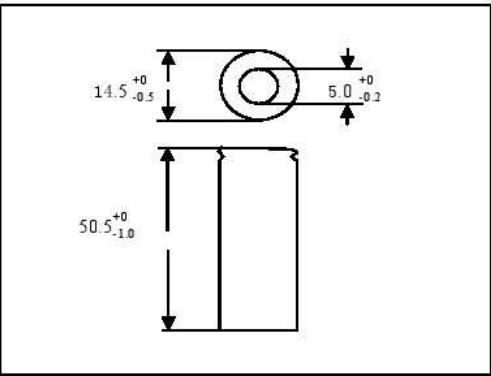

备注 Note:



1. 标称容量是指 20℃ 时 0.2C 放电容量  
Nominal capacity, rated at 0.2C 20℃.
2. 容量只作为参考  
Average capacity, for reference only.
3. 重量和内阻也作为参考  
Weight and internal Resistance are For reference.

制造商保留在没有预先通知的情况下改变和修正设计及规格说明书的权利


Manufacturer reserve the right to alter or amend the design, model and specification without prior notice

典型特征 Typical characteristics

充电特征 Charge characteristics

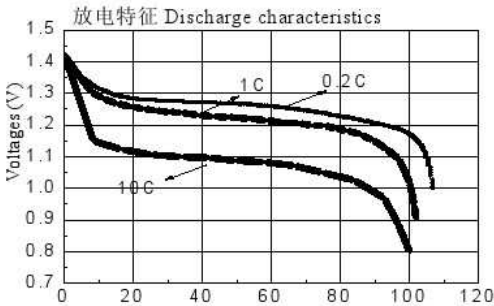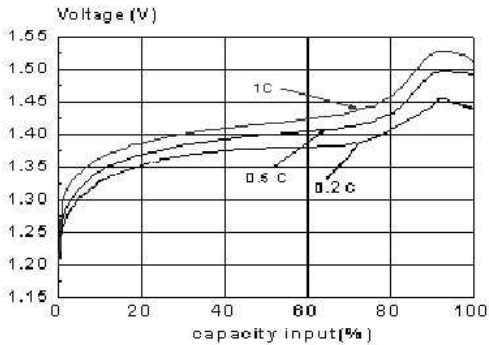

Discharge capacity (%)

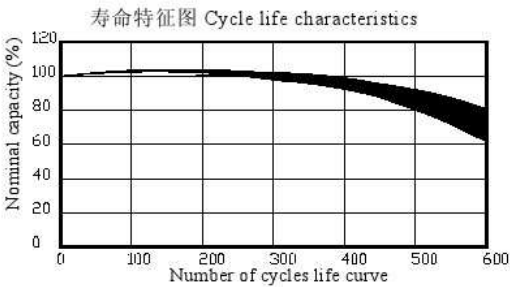

Ni-MH 圆柱型电池在不同的温度荷电保持曲线图  
Charge retention curves of Ni-MH cylindrical cell At various storage temperature

